


Datasheet of 200W LED Prime Series Floodlight

Product Name 200W LED Prime Series Floodlight
 Product SKU ML-PRM-200W-6K

- Product Characteristics
- 100 Lumens per watt
 - Equipped with a massive 4kV Surge Protection
 - Wide input voltage AC170-264V
 - Design allows for autoproduction which provides a truly stable, reliable and cost effective solution to the floodlight market
 - Robust ADC12 graded die-cast aluminium housing
 - H05RN, 3*1.0mm², 0.5m
 - IP65 / IK08
 - 2 year warranty

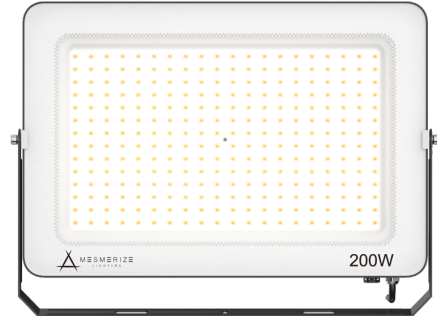

Application Residential, Domestic

Product Specification

Power	200W
LEDs	 国星光电 SMD2835
Lumen	20000 lm
Colour	6500K
Colour Rendering Index	RA>80
UGR Rating	<27
Beam Angle	110°
Operating Temperature	-20°C~+45°C
Lifespan	30,000hrs@25°C, L70B50
Driver	Multi-Segment Linear DOB
Power Factor	0.9PF
Input Voltage	AC170-264V
Input Frequency	50/60Hz
Dimmable	Non-dimmable
Surge Protection	4kV
IK Rating	IK08
Energy efficiency class	Class F
Ingress Protection Rating	IP65
Cable	Rubble, H05RN, 3*1.0mm ² , 0.5m
Main Materials	ADC12 Graded Aluminium
Certifications	IEC / CB / CE / ROHS
Warranty	2 Year Warranty
Dimensions	435mm(L) * 320mm(W) * 28mm(H)

